

PRACTICAL HOUSEHOLDER

PRESENTED WITH THE NOV. ISSUE PRACTICAL HOUSEHOLDER
1965

PROBLEM KITCHENS
REMODELLED.....

COLOUR SCHEMES

UNITS & FITMENTS
TO BUILD.....

HOW TO PLAN A..
DINING - KITCHEN



WHAT'S NEW IN...
APPLIANCES.....

GUIDE TO KITCHEN IMPROVEMENT



15 Ring circuits provide ample sockets for kitchen equipment but cooker, water heater and lighting should be separately wired.

MAIN SWITCH AND FUSE BOX

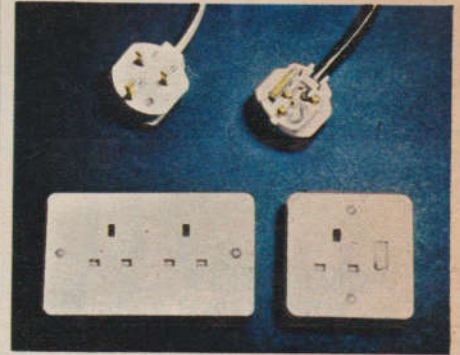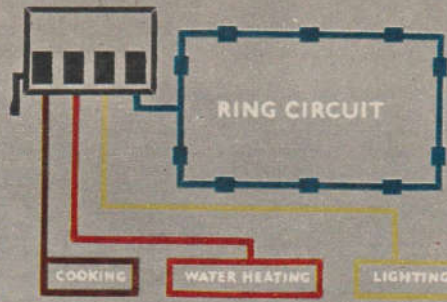


6 Flush-fitting 13 amp wall sockets with plugs tused to suit the appliance to which they are connected




17 Adaptors mean you need more properly-wired socket outlets! A good position for some outlets is about 9in. above a work top.




18 Open windows ventilate, but extractor fans may do it more controllably. Portable fires aren't safe in kitchens, the wall mounting type are better

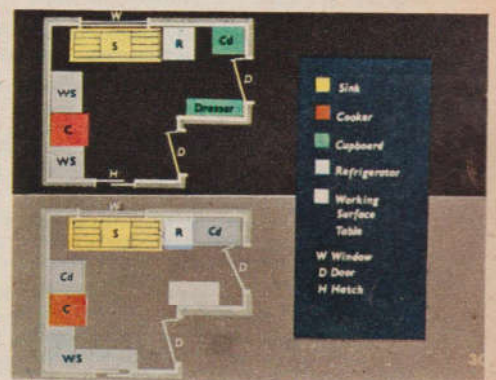

20 The kitchen of Fig. 1 improved by re-arrangement and some extra working surface, and additional units

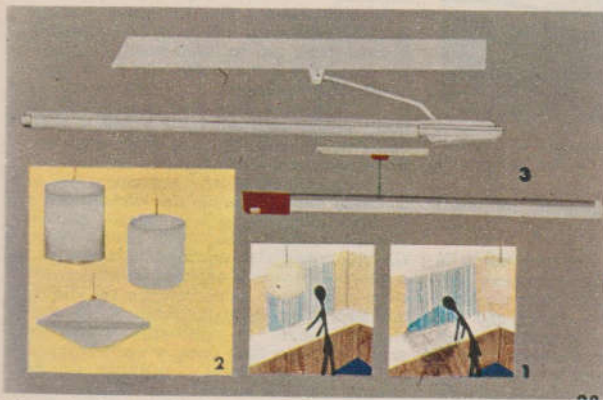

19 A single central bulb is unsatisfactory. Better have several. A single fluorescent light may do in small kitchens

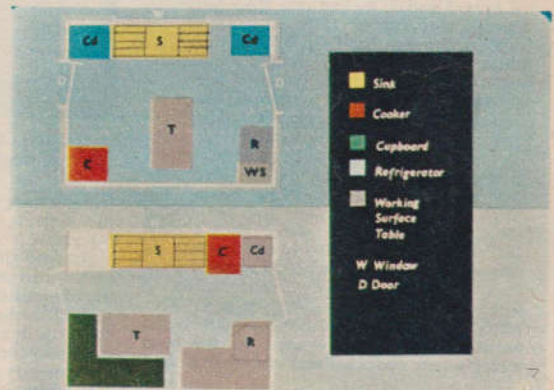

21 Since moving the cooker is easier than moving the sink, this is one of the important changes in Kitchen No. 2


22 Suggestions for enabling meals to be taken in a small kitchen, with kettle or percolator and toaster etc. all to hand

23 Mum has the right to regard the kitchen as her domain. The family should always ask permission




GUIDE TO KITCHEN IMPROVEMENT

UP TO DATE IN THE KITCHEN

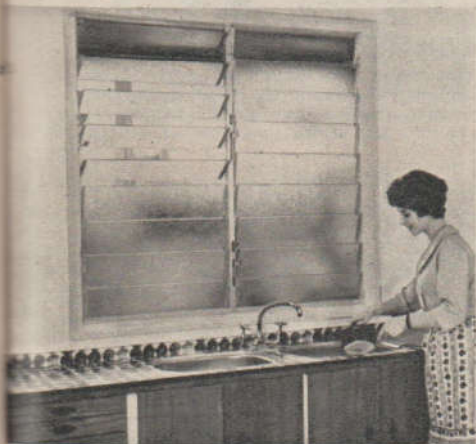


NACO LOUVRE WINDOWS are weather-sealed when closed, give controlled no-draught ventilation when set at an angle and 100 per cent ventilation when fully open. Frames consist of a pair of steel or aluminium channels with 2/14 adjustable 6in. louvre clips mounted on aluminium alloy bearings. Head and sill strip, cadmium plated screws and glass blades are provided

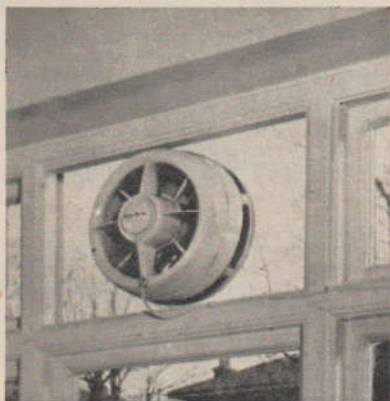


VENT-AXIA extractor fans for wall or window fixing can be supplied with control switches to give low, normal and boost performance, and shutters as optional extras. The 6in. or 7½in. sizes with a capacity of 10,000 and 15,000 cu. ft. per hour are recommended for domestic use. Price, from £12 8s. 5d.

A REVIEW OF EQUIPMENT THAT'S NEW

A modern kitchen needs up-to-date equipment so that the housewife can reap the full benefit from the alterations carried out

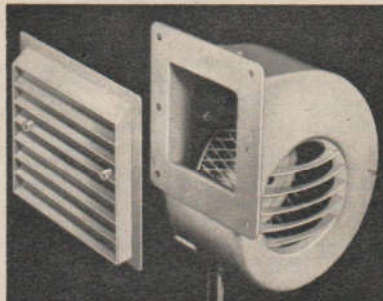

EKCO HI-FLO extractor fan requires an opening of only 3in. square or 4in. diameter. It provides gentle and continuous ventilation for a small room. A pull-cord switch is built in and 6ft. of flexible cord enables it to be connected to any convenient electric point. Price £5 15s. 2d.

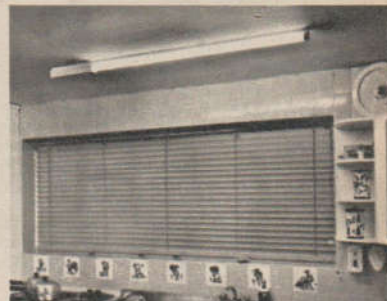


CROMPTON GRACELINE fluorescent fitting for 220v to 250v A.C. supplies, has a 40w warm white tube and instant start control gear. It is available in three colours—honey beige, coral pink and mist blue—and measures 59in. long x 2in. wide x 2½in. deep. Price: 82s. 6d.



THERMOR EXTRACTAIR CANOPY fan removes the vapours and smells as they develop. It can be fitted horizontally or vertically to an outside wall, unused chimney, air duct or ceiling. The air moving capacity is 17,500 cu. ft. per hour. A balanced shutter to prevent back draught is provided. Price: £15 1s. 7d. Speed regulator and switch, £3 10s.



UTILAIR COOKER HOOD is a steam and fume trap. Steam rising into hood is condensed and runs into channel round hood. When cooking stops, moisture evaporates. Two hours cooking is possible before channel overflows. Price in cream or white, 99s. 6d. Utilair Ltd., 108 Auckland Hill, West Norwood, London, S.E.27

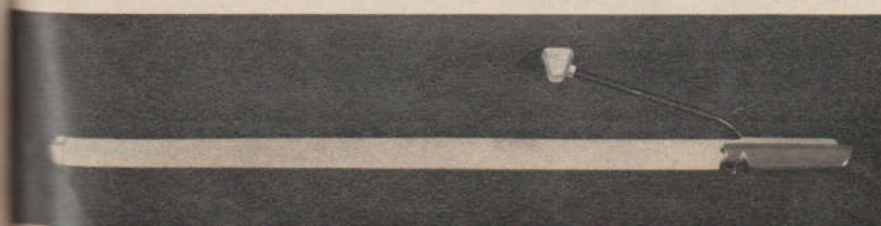

MAZDA NETALINE is fitted with a 4ft. 40w fluorescent tube and suspended from one bracket fixed to the ceiling with two screws. It weighs 3½ lb. and has an overall length of 56in. and depth of 9in. Available in blue, red, yellow or white, it retails at 85s. and is guaranteed for one year