

Domestic/Commercial Ventilation



RECORD
Wall and ceiling extractor fans for bathrooms, toilets and kitchens.
Optional variable speed controller:
VM4 - 96 m³/hr
VM5 - 190 m³/hr
VM6 - 380 m³/hr




RECORD TIMER
Wall and ceiling extractor fans for bathrooms, toilets and kitchens, with or without electronic timer, adjustable to over run 3-30 minutes.
VM4T - 96 m³/hr
VM5T - 190 m³/hr
VM6T - 380 m³/hr




VORTAER XW6
Window/wall cord operated extractor fan Optional variable speed controller. 250 m³/hr.
VORTAER XW8/XW10
Window/wall cord operated extractor fans. Optional variable speed reverse flow remote electronic controller.
XW8 - 300 - *650 m³/hr
XW10 - 600 - *1100 m³/hr
*Fans operate on maximum speed without controller.




VORTICE
Extract Fan for windows. Double Glazing. Walls Built-in.
V15/6 - 210 m³/hr
V23/9 - 500 m³/hr
V23/9T & V23/9B - 585 m³/hr
V30/12T - 1125 m³/hr



OPTIMAL OP4/OP4T
Centrifugal duct fans for bathrooms, kitchens and toilets with or without electronic timer. Adjustable to over run from 3-30 minutes. Optional variable speed controller for models without timer.
170 m³/hr, 23 mm/H₂O.




COOKERHOOD G2
60-80-90 cm



POLIVALENTE
Centrifugal duct fan for bathrooms, kitchens and toilets with or without electronic timer, adjustable to over run from 3-30 minutes. Optional variable speed controller for models without timer.
270 m³/hr, 27 mm/H₂O.




AER K-AK1
In-line, mix-flow, centrifugal duct fans. Optional variable speed controller. 150 m³/hr, 15 mm/H₂O.



ELECTRONIC CONTROLLER
Remote, variable speed reversible or non-reversible

Industrial Ventilation



VORTICEL
Industrial axial fans in die-cast aluminium. In 25, 30, 35, 40, 50 and 60 cm diameters. Available in single or three phase. 2 pole or 4 pole motor. Optional variable speed controller.



VORTICENT
Industrial centrifugal fans. In 10, 15, 20, 25, 30, 35, 40 and 45 cm diameters. Available in single or three phase. Optional variable speed controller.



TORRETTE
Roof fans for ducting and flue extraction.

Domestic Appliances



CALDODO
Thermostatically controlled portable convector heater 60 cm wide. 1000-2000 watts.




CALDOSOL 47
Panel radiator for fixed installation with thermostat 47 cm wide. 300-600 watts

CALDOSOL 69
Panel radiator for fixed installation with thermostat 69 cm wide. 400-1000 watts

CALDOSOL 94
Panel radiator for fixed installation with thermostat 94 cm wide. 200-1500 watts



NORDIK N35P
Oscillating pedestal fan with variable speed electronic controller. 35 cm diameter.




NORDIK
Oscillating desk table fans
N20 - 2 speed. 20 cm dia. 650 m³/hr.
N30 - 3 speed. 30 cm dia. 1600 m³/hr.
N35 - 3 speed. 35 cm dia. 1950 m³/hr.
N30W - wall mounted with variable speed electronic controller. 30 cm dia. 1600 m³/hr.



NORDIK C90/C140
Ceiling fans with variable speed electronic controller 90 cm and 140 cm diameters.



ARIANTE
Desk/table fan. 480 m³/hr.

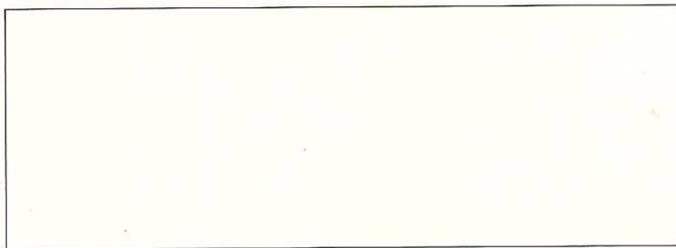

Vortice Ltd reserves the right to alter specifications as part of their policy of continuous development.

Vortice Ltd,
Rodd Industrial Estate,
Govett Avenue,
Shepperton,
Middx TW17 8AF.
Tel.: Walton-on-Thames 47734.
Telex: 935466.



BOUGHT APRIL 1986